

Yuasa Technical Data Sheet

Yuasa DCB1275-12(ET) 12V 150Ah GS Yuasa Pro-Spec deep cycle battery

Specifications

Nominal Voltage (V)	12 V
Capacity (20hr) (Ah)	150
Capacity @ 75A (mins)	70
Capacity @ 25A (mins)	290

5-Hr Capacity By Temperature


5-hr Capacity @ 40°C	105%
5-hr Capacity @ 30°C	100%
5-hr Capacity @ 0°C	80%

Dimensions

Length (mm)	329
Width (mm)	181
Height (mm)	276
Weight (kg)	37.5

Terminal Type

Terminal Type	ET
---------------	----

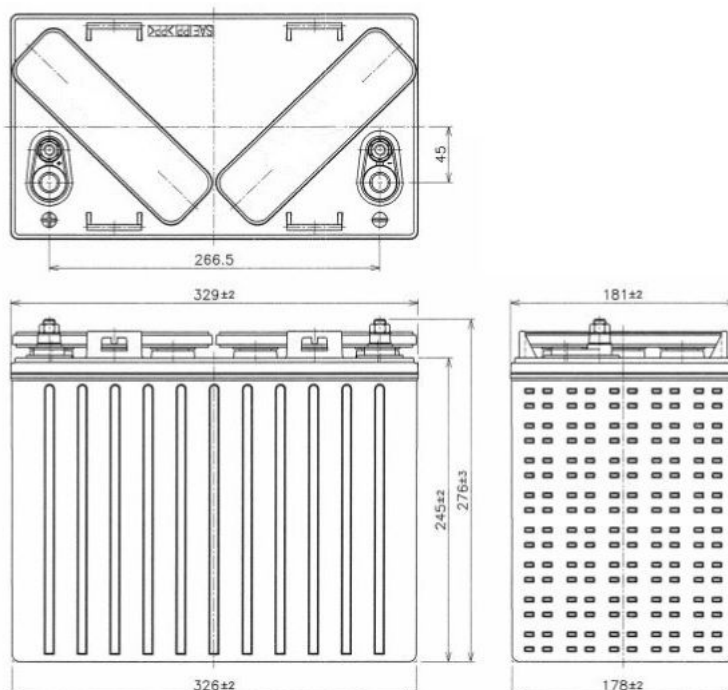

Material Specifications

Cover Style	Removable - Maintenance Possible
Cover Vent Style	Gang style
Container & Cover Material	Black polypropylene plastic
Case to Cover Seal Method	Heat sealing
Inner Cell Connector Type	Through-partition weld
Plate Lug Weld Method	Automated cast-on process
Positive Grid Material	Antimony lead alloy
Negative Grid Material	Antimony lead alloy
Separator Type	PE

Safety

Installation	Can be installed and operated in orientations up to 90° from the upright position.
Handles	Batteries must not be suspended by their handles (where fitted).
Vent valves	Each cell is fitted with a low pressure release valve to



by **GS YUASA**

www.yuasa.com