

Secure
Power
Solutions






Industrial Batteries

FIAMM

Industrial Batteries

Europe Middle East Africa
ENGLISH

Industrial Batteries




AGM VRLA				
FG	FGL	FGC	FGH	FGHL
				
AGM VRLA	AGM VRLA	AGM VRLA	AGM VRLA	AGM VRLA
FIAMM AGM batteries have optimized internal gas recombination and are maintenance free without topping up. They are non-spillable, non-hazardous for transportation and 100% recyclable				

- main application
- secondary application

application & usage	high rate UPS				●	●
	telecom					
	emergency, security, signaling & other UPS	●	●		●	●
	IT network & data centers	●			●	●
	industry & process controls		●			
	utilities					
	oil & gas / switchgear					
	leisure, toys & minor traction	●	●	●	●	●
	renewable energy storage	●	●	●		
	designed for use also at elevated temperature					
	unstable grid installation			●		
off-grid installation	●	●	●			
technology & design	positive plate & electrolyte	flat plate electrolyte absorbed	flat plate electrolyte absorbed	flat plate electrolyte absorbed	flat plate electrolyte absorbed	flat plate electrolyte absorbed
	DIN type					
	target discharge profile	15min to 20h discharge	15min to 20h discharge		high rate	high rate
	deep discharge (DIN 43539T5 for VRLA)			✓		
	design life*	5 years	10 years	5 years	5 years	10 years
	maintenance	maintenance free	maintenance free	maintenance free	maintenance free	maintenance free
	Eurobat classification	Standard Commercial 3-5 years	High Performance 10-12 years	Standard Commercial 3-5 years	Standard Commercial 3-5 years	High Performance 10-12 years
	nominal voltage	6V - 12V	12V	12V	12V	12V
	capacity range	0.8 to 70 Ah	17 to 205 Ah	12 to 42 Ah	23 to 65 watts per cell	22 to 48 watts per cell
	design & installation	depending on model: faston, wire+connector or flag	female terminals	depending on model: faston, flag or female	depending on model: faston or flag	faston terminals
	FV0 flame retardant plastics			optional		✓
remote venting						

* in float operation and temperature controlled environment

Industrial Batteries




AGM VRLA		
FLB	SLA	FIT
		
AGM VRLA	AGM VRLA	AGM VRLA
FIAMM AGM batteries have optimized internal gas recombination and are maintenance free without topping up. They are non-spillable, non-hazardous for transportation and 100% recyclable		

- main application
- secondary application

application & usage	high rate UPS	●	●	
	telecom		●	●
	emergency, security, signaling & other UPS	●	●	●
	IT network & data centers	●	●	●
	industry & process controls		●	
	utilities		●	●
	oil & gas / switchgear		●	
	leisure, toys & minor traction			
	renewable energy storage			
	designed for use also at elevated temperature			
	unstable grid installation			
off-grid installation				
technology & design	positive plate & electrolyte	flat plate electrolyte absorbed	flat plate electrolyte absorbed	flat plate electrolyte absorbed
	DIN type			
	target discharge profile	high rate	high rate to long discharge	30min to 10h discharge
	deep discharge (DIN 43539T5 for VRLA)			
	design life*	12 years	>12 years	>12 years
	maintenance	maintenance free	maintenance free	maintenance free
	Eurobat classification	High Performance 10-12 years	Long Life 12 years and longer	Long Life 12 years and longer
	nominal voltage	6V - 12V	2V - 4V - 6V - 12V	12V
	capacity range	100 to 800 watts per cell	24 to 2000 Ah	40 to 180 Ah
	design & installation	very high energy density	very high energy density	front terminal for 19" and 23" cabinets
	FV0 flame retardant plastics	✓	✓	✓
remote venting	on selected models		✓	

* in float operation and temperature controlled environment

Industrial Batteries




GEL VRLA		
XL	SMG 12V	SMG
		
GEL VRLA	GEL VRLA	GEL VRLA
FIAMM flat plate gel blocs for unstable grid application	FIAMM tubular gel batteries are designed for cycling and excellent temperature resistance	

- main application
- secondary application

application & usage	high rate UPS			
	telecom	●	●	●
	emergency, security, signaling & other UPS			●
	IT network & data centers			
	industry & process controls			●
	utilities			●
	oil & gas / switchgear			●
	leisure, toys & minor traction			
	renewable energy storage	●		
	designed for use also at elevated temperature	●	●	●
	unstable grid installation	●	●	●
off-grid installation	●	●		
technology & design	positive plate & electrolyte	flat plate electrolyte in gel	tubular electrolyte in gel	tubular electrolyte in gel
	DIN type			DIN 40742 OPzV
	target discharge profile	30min to 10h discharge	1h to 10h discharge	1h to 10h discharge
	deep discharge (DIN 43539T5 for VRLA)	✓	✓	✓
	design life*	>12 years	15 years	18 years
	maintenance	maintenance free	maintenance free	maintenance free
	Eurobat classification	Long Life 12 years and longer	Long Life 12 years and longer	Long Life 12 years and longer
	nominal voltage	12V	12V	2V cells
	capacity range	60 to 200 Ah	100 to 130 Ah	220 to 3350 Ah
	design & installation	also available with front terminal for 23" cabinets	front terminal for 23" cabinets	vertical or horizontal installation
	FV0 flame retardant plastics	✓	✓	optional
remote venting	✓	✓		

* in float operation and temperature controlled environment

Industrial Batteries

FLOODED		
SD / SDH	LM	SGL / SGH
		
Vented	Vented	Vented
FIAMM traditional batteries are available for high to long discharge application, also for use with unstable grid and deep discharge. Minimum maintenance and topping up is required		

- main application
- secondary application

application & usage	high rate UPS	●		●
	telecom		●	●
	emergency, security, signaling & other UPS	●	●	
	IT network & data centers	●	●	
	industry & process controls	●	●	●
	utilities	●	●	●
	oil & gas / switchgear	●	●	●
	leisure, toys & minor traction			
	renewable energy storage			
	designed for use also at elevated temperature			
technology & design	unstable grid installation	●	●	
	off-grid installation			
	positive plate & electrolyte	flat plate free electrolyte	tubular free electrolyte	Planté pure lead free electrolyte
	DIN type		DIN 40736 OPzS	DIN 40738 GroE
	target discharge profile	high rate to 10h discharge	1h to 10h discharge	high rate to 10h discharge
	deep discharge (DIN 43539T5 for VRLA)		✓	
	design life*	15 years	20 years	25 years
	maintenance	3 year topping up in float condition	3 year topping up in float condition	3 year topping up in float condition
	Eurobat classification			
	nominal voltage	2V cells	2V cells	2V cells
capacity range	80 to 2320 Ah	100 to 3500 Ah	75 to 2600 Ah	
design & installation	also available dry charged	also available dry charged	also available dry charged	
FV0 flame retardant plastics				
remote venting				

* in float operation and temperature controlled environment

Industrial Batteries

RENEWABLE ENERGY

LM Solar

SMG Solar



Vented

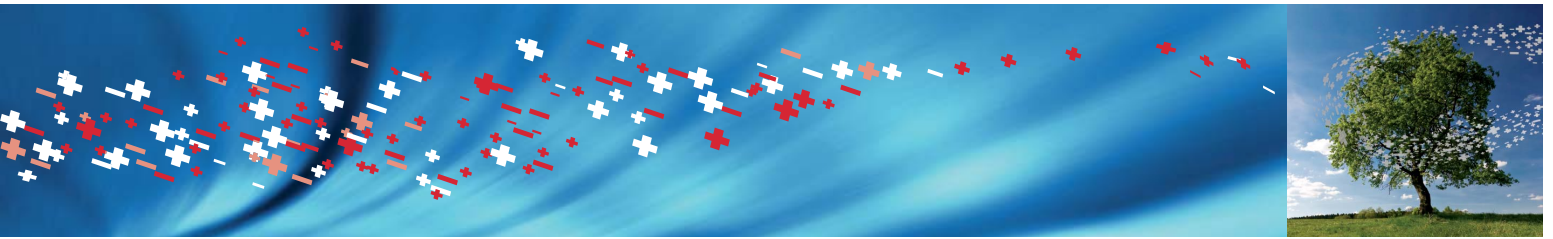
GEL VRLA



FIAMM Solar batteries are designed for use with renewable energy island and other off-grid applications

- main application
- secondary application

		LM Solar	SMG Solar
application & usage	high rate UPS		
	telecom	●	●
	emergency, security, signaling & other UPS	●	●
	IT network & data centers	●	
	industry & process controls	●	●
	utilities	●	●
	oil & gas / switchgear	●	●
	leisure, toys & minor traction		
	renewable energy storage	●	●
	designed for use also at elevated temperature	●	●
	unstable grid installation	●	●
	off-grid installation	●	●
technology & design	positive plate & electrolyte	tubular free electrolyte	tubular electrolyte in gel
	DIN type	DIN 40736 OPzS	DIN 40742 OPzV
	target discharge profile	up to 120h long discharge	up to 120h long discharge
	deep discharge (DIN 43539T5 for VRLA)	✓	✓
	design life*	20 years	18 years
	maintenance	3 year topping up in float condition	maintenance free
	Eurobat classification		Long Life 12 years and longer
	nominal voltage	2V cells	2V cells
	capacity range	150 to 5000 Ah	265 to 3900 Ah
	design & installation	also available dry charged	vertical or horizontal installation
FV0 flame retardant plastics		optional	
remote venting			

* in float operation and temperature controlled environment



SODIUM	
SoNick 48TL	SoNick RW
	
Sodium Nickel Chloride	Sodium Nickel Chloride
Energy storage devices with lowest cost of ownership and zero ambient emission, designed to operate in extreme temperature conditions	

- main application
- secondary application

application & usage	application	telecom	railway
	designed for use also at elevated temperature	●	●
	unstable grid installation	●	
	off-grid installation	●	
technology & design	technology	Sodium Nickel Chloride cells	Sodium Nickel Chloride cells
	target discharge profile	up to 12h discharge	up to 12h discharge
	deep discharge	✓	✓
	design life*	20 years at -20° to +60°C operation	20 years at -25° to +65°C operation
	maintenance	zero maintenance & remote monitoring	zero maintenance & remote monitoring
	interface	48TL80: RS 232 (option RS 485) others: RS 485 / USB / Ethernet / CAN-bus	CAN-bus
	applicable standards	- EN 61000-6-1 - CE - NEBS DA1976 Level 1 and Level 3 48TL120, 48TL160, 48TL200, 48TL160H: certified	Designed to comply with: - IEC 60571 / 61373 / 61571 / 61991 / 62236-3-1 - EN 50121-1 / 51121-3-1 / 51121-3-2 / 50126 / 50128 / 50129 / 50155:2007 - EN 60529 (IP65) - NFPA 130 - UL-1973
	nominal voltage	48V	110V
	capacity range	80 to 200 Ah	80 Ah
	energy density	70% lighter and 30% smaller than conventional technologies	70% lighter and 30% smaller than conventional technologies
	casing	double stainless steel case**	double stainless steel case
energy storage room	zero emission no venting required	zero emission no venting required	

* in float operation

** 48TL-H models: optimized insulation to guarantee lowest thermal loss and maximize the energy efficiency of the energy storage device

FIAMM

Industrial Batteries

FIAMM HEADQUARTERS

FIAMM S.p.A.
Viale Europa, 75
Montecchio Maggiore 36075 (VI)
ITALY
Tel +39 0444 709311
Fax +39 0444 694178
info.standby@fiamm.com

SALES OFFICES

EUROPE

FIAMM S.p.A.
Viale Europa, 75
Montecchio Maggiore 36075 (VI)
ITALY
Tel +39 0444 709311
Fax +39 0444 694178
info.standby@fiamm.com

MIDDLE EAST & AFRICA

FIAMM S.p.A.
Viale Europa, 75
Montecchio Maggiore 36075 (VI)
ITALY
Tel +971 56 1016056
Fax +39 0444 694178
info.standby@fiamm.com

CZECH REPUBLIC

Fiamm Czech
Nádražní 84
Mladá Boleslav - 293 01
CZECH REPUBLIC
Tel +420 326 714 389
Fax +420 326 714 460
info.standby@fiamm.com

FRANCE

FIAMM FRANCE
12 Rue Augustin Fresnel
78410 Aubergenville
FRANCE
Tel +33 1 39297701
Fax +33 1 30903369
info.standby@fiamm.com

NORTH AMERICA

FIAMM Energy, LLC
Battery Division
1 Fiamm Way
Waynesboro, GA 30830 - USA
Tel +1 (706) 437-3220
Fax +1 (706) 437-3300
info.standby.america@fiamm.com

LATIN AMERICA

FIAMM Latin America Ltda.
Av. Piraporinha, 121
CEP 09891-0000
São Bernardo do Campo - SP - Brasil
Tel +55 11 3737 6137
Fax +55 11 3737 6116
baterias.industriais@fiamm.com

AUSTRIA

BÄREN Batterie GmbH
Dr. Leopold Jungfer Straße 10
A-9181 Feistritz im Rosental
AUSTRIA
Tel +43 (0) 4228 2036 - 0
Fax +43 (0) 4228 2036 68
info.standby@fiamm.com

UNITED KINGDOM

FIAMM UK Ltd
Unit 12a Ridings Park
Eastern Way, Hawks Green
Cannock WS11 7FJ
UNITED KINGDOM
Tel +44 1543 456970
Fax +44 1543 574908
info.standby@fiamm.com

ASIA PACIFIC

FIAMM ASIA PACIFIC Pte Ltd
3B Toh Guan Road East #01-00
Singapore 608833
Tel +65 6867 6152
Fax +65 68626550
info.standby.asia@fiamm.com

CHINA

FIAMM ENERTECH CO., LTD
Hannan Road 458, Shamao Town
Hannan District
Wuhan City, Hubei Province, P.R. CHINA
P.C.430090
Tel +86 27 84782000
Fax +86 27 84782888
info.standby.asia@fiamm.com

GERMANY

FIAMM GmbH
Hansestrasse 101
51149 Köln
GERMANY
Tel + 49 02203 92578-0
Fax +49 02203 92578-49
info.standby@fiamm.com

SPAIN

FIAMM IBERICA SA
Calle Esteban Terradas, 6
Pl Nuestra Senora de butarque planta 2º Oficina nº11
28914 Leganes Madrid
SPAIN
Tel +34 91 4880247
Fax +34 91 6105618
info.standby@fiamm.com