



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 70Ah |
| Cold Cranking Amps (EN1) | 760A |

Dimensions

| | |
|--------|-------|
| Length | 278mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 20.5kg |
|-----------------------|--------|



Container Features

| | |
|------------------------|------------|
| Case Type | L3 DIN AGM |
| Hold Down | B3 |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |

Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca VRLA |
| Separator | AGM |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 4A |
| Performance Marking | W5-C2-V3-M3 |

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

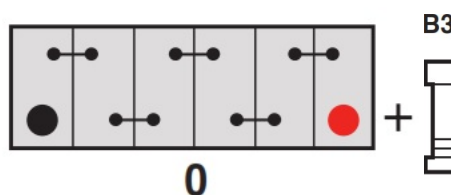

Battery Hold-down

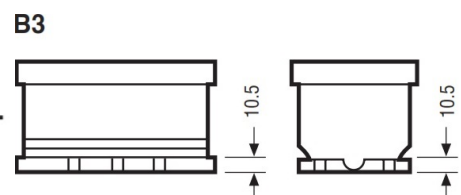

Data Sheet generated on 27/10/2020 - E&OE